

# LINE DIAGRAM - TUNABLE WHITE - ANALOG I/C METHOD

## SU-5 & (1) 2-CHANNEL DRIVER ON (1) CU-4E-FMH

SENSOR	CABLE TYPE
SU-5E	CBL-5E-CU4-30N
SU-5E	CBL-5E-CU4-7F
SU-5S-H	CBL-RJ45-RJ45-7F
SU-5S-LRW	Sensor includes 22" of cable*
SU-5S-HRW	Sensor includes 22" of cable*
SU-5S-LRB	Sensor includes 22" of cable*
SU-5S-HRB	Sensor includes 22" of cable*

\* NOTE: If more than 22" is needed, add part numbers, CBL-RJ45-RJ45-7F and CPL-RJ45


### APPROVED DRIVERS:

Samsung SLP-DUA45501US  
 Moons MU050S150BQlxxx

### DRIVERS NOTES:

Follow manufacturer's guidelines for proper LED wiring

CU OUTPUT RATING  
 5.0A @ 120V = 600 watts  
 5.0A @ 277V = 1385 watts  
 INRUSH WITHIN NEMA-410 LIMIT

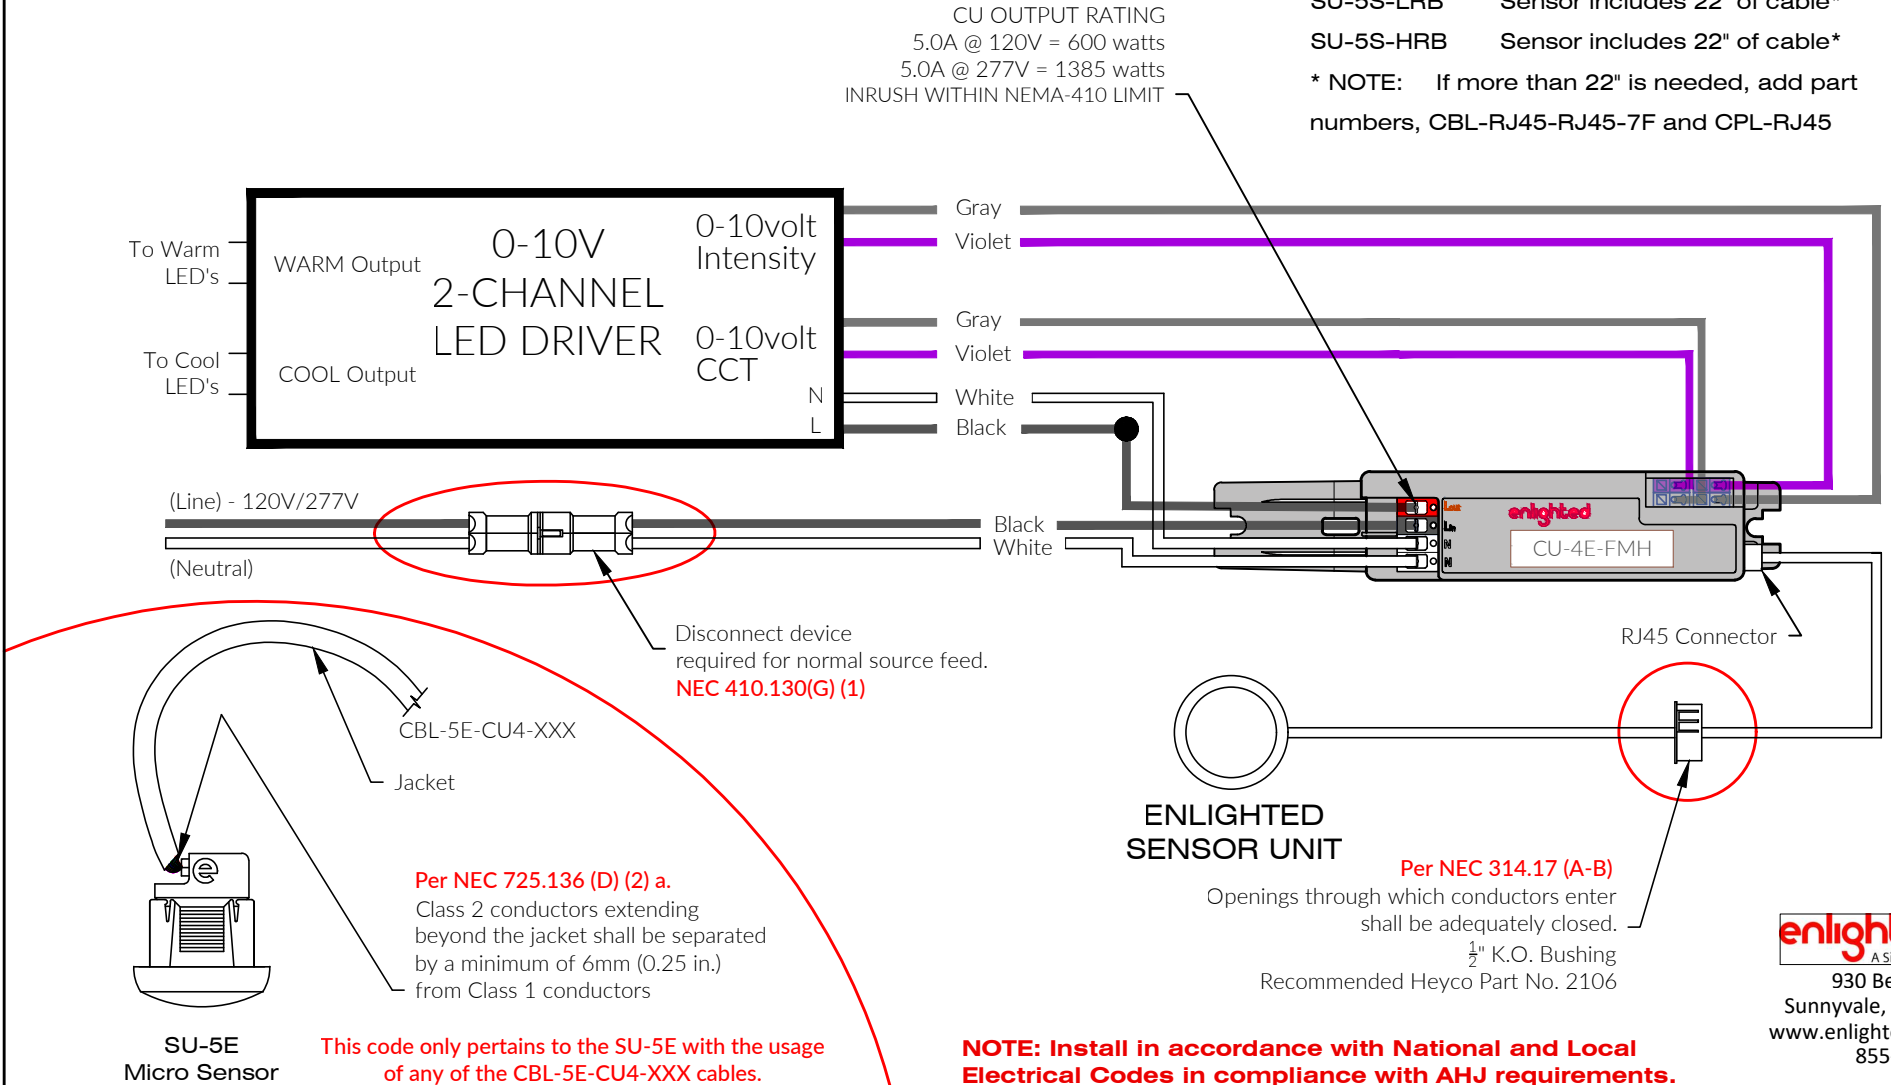

930 Benecia Ave  
 Sunnyvale, CA 94085  
 www.enlightedinc.com  
 855-874-1692

**NOTE: Install in accordance with National and Local Electrical Codes in compliance with AHJ requirements.**